




FEATURES


- Add CCT tuning to an existing 0–10V dimming fixture without replacing the driver with a dual 0–10V driver.
- This device can be powered by 12V auxiliary power from a dim-to-off LED driver for ease of setup and operation.
- This device is suitable for a variety of indoor applications.

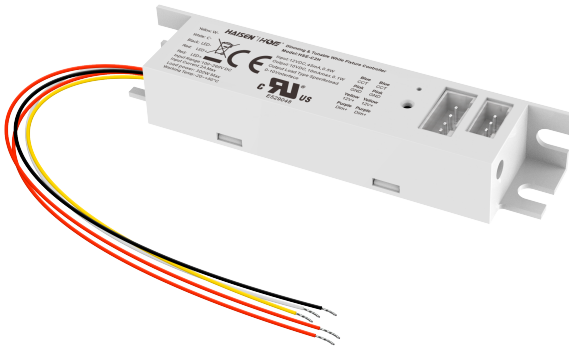

SPECIFICATIONS

Input Voltage	100-260VDC
Auxiliary Input Voltage	9-15VDC
Input Power	300W(Max)
Input Current	< 2A
Output Voltage	100-260VDC
Output Power	300W(Max)
Output Current	< 2A
CCT Setting	2700K-6500K (Subject to CCT of the lighting fixture)
Dim level	0%-100%
Working Temperature	-20°C to 50°C
IP Rating	IP20

DIMENSIONS

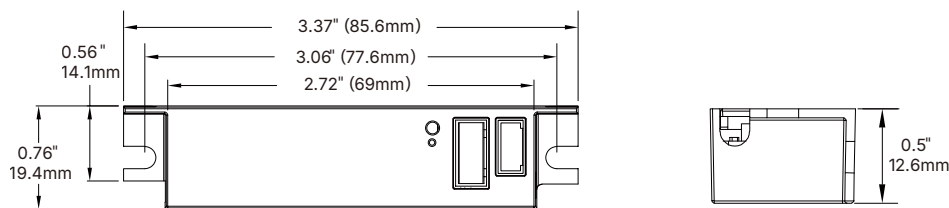

WIRING

